
Discriminately Decreasing Discriminability with Learned Image Filters

Jacob Whitehill and Javier Movellan
Machine Perception Laboratory
University of California, San Diego
La Jolla, CA 92093
{ jake, movellan }@mplab.ucsd.edu

Abstract

In machine learning and computer vision, input images are often filtered to increase data discriminability. In some situations, however, one may wish to purposely *decrease* discriminability of one classification task (a “distractor” task), while simultaneously *preserving* information relevant to another (the task-of-interest): For example, it may be important to mask the identity of persons contained in face images before submitting them to a crowdsourcing site (e.g., Mechanical Turk) when labeling them for certain facial attributes. Another example is inter-dataset generalization: when training on a dataset with a particular covariance structure among multiple attributes, it may be useful to *suppress* one attribute while preserving another so that a trained classifier does not learn spurious correlations between attributes. In this paper we present an algorithm that finds optimal filters to give high discriminability to one task while simultaneously giving low discriminability to a distractor task. We present results showing the effectiveness of the proposed technique on both simulated data and natural face images.

1 Introduction

In machine learning and computer vision, images are commonly filtered prior to classification to enhance class discriminability. Such filters may consist of manually constructed filters (e.g., low-pass, band-pass filters) or may be learned directly from the data (e.g., using Deep Belief Networks [7] or Independent Components Analysis [1]). However, there also exist scenarios in which it may be useful to intentionally *decrease* discriminability for *one* classification task (a “distractor” task), while enhancing or at least preserving discriminability for *another* task (the task-of-interest). Discriminability can pertain to perception by humans, or analysis by a machine classifier. Two scenarios where such filtering is useful include (1) preservation of privacy during data labeling, and (2) generalization to datasets with different correlation structure.

(1) *Preservation of privacy*: Machine learning is increasingly making use of crowdsourcing services such as the Amazon Mechanical Turk, in which not all labelers can be trusted. In some situations, the data to be labeled may contain sensitive information that should not be released to the public, e.g., the identity of people’s faces or the geographical locations of satellite images. It may be useful to first filter the images before uploading them to the Mechanical Turk so that identity/location is removed, but so that the task-of-interest remains highly discriminable. For the case of facial identity removal, this process is known as face de-identification [9].

(2) *Generalization to datasets with different correlation structure*: In some training datasets there exist strong correlations between different attributes that can impair generalization performance to data with different covariance structure (*covariate shift*). Consider, for example, a classifier, intended to recognize some attribute A, that is trained on a dataset in which there is a strong correlation between

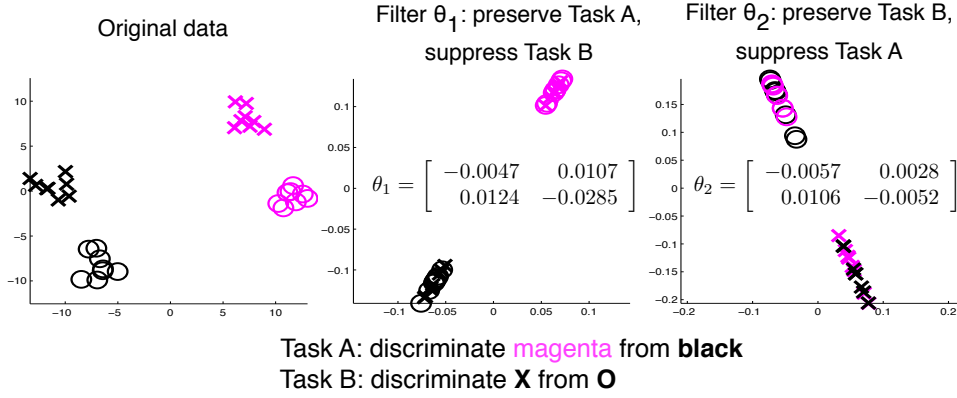


Figure 1: A minimal example in R^2 showing (left) unfiltered data, data filtered to preserve Task A’s and suppress Task B’s discriminability (center), and data filtered to suppress Task A’s and preserve Task B’s discriminability (right).

attributes A and B. Such a classifier may perform very badly when tested on a different dataset in which the correlation between A and B is low or perhaps negative. It may be useful, when training a classifier for A, to first filter the training data to *preserve* discriminability of A, while *suppressing* discriminability of B, so that the spurious correlation between A and B is not learned.

In this paper, we present a novel algorithm for learning an image filter (parameterized by θ) from labeled data that simultaneously *preserves* discriminability of the task-of-interest while *suppressing* discriminability of the distractor task. In this sense, the filter “discriminately decreases discriminability” of the images. In the experiments in the paper, we focus on *image* filters, but in fact the data can be of any dimensional representation. We focus on discriminating *binary* attributes, but as shown in Section 6, suppression of binary gender discrimination also significantly removes face identifiability as well. Before presenting our algorithm in Section 3, we first provide a simple example of “discriminately decreasing discriminability” in Section 2. The rest of the paper consists of experimental results.

2 Simple example in R^2

Consider the set of 28 data points $\{x_i\}$ (in R^2) shown in Figure 1 (left): Each point x_i is given binary labels for two labeling tasks. Points labeled 0 for Task A are shown in magenta, while points labeled 1 for task A are black. On the other hand, points labeled 0 for Task B are marked as crosses, while points labeled 1 are shown as circles. In their unfiltered original form, both tasks are easily discriminated, as illustrated in Figure 1.

Suppose now that we filter the data using θ_1 (in this case, a general linear transformation), as shown in the **center** part of the figure: Task A (color) is highly discriminable, while Task B (marker) is not – the two marker styles (circles and crosses) appear to overlap. Similarly, we can use θ_2 to suppress discriminability of Task A and preserve discriminability of Task B, in which case we arrive at the filtered points shown in Figure 1 (right). The goal of the algorithm in this paper is to learn such linear transformations (filters) automatically.

3 Algorithm: Learning a filter to discriminately decrease discriminability

The proposed method requires quantifying data discriminability as J^* , as described in the next subsection. The key is that J^* can be found *analytically* as a function of its input. Using J^* , we pose an optimization problem to maximize the ratio of discriminabilities of Tasks A and B w.r.t. the filter θ which transforms the data.

3.1 Quantifying discriminability as J^*

The measure of discriminability we use is the ratio of between-class variance to within-class variance, first proposed by Fisher [4] and used in Fisher’s Linear Discriminant analysis.

Let $\{x_i\}$ represent a set of data (column vectors) to be classified, where each $x_i \in \mathcal{R}^d$, and let $y_i \in \{0, 1\}$ represent the binary class label for each x_i for some labeling task. In our setting, each x_i might be a face image with d pixels, and each y_i might represent, for example, whether or not the person in image i is smiling. One useful measure of discriminability of the data w.r.t. the class labels is Fisher’s discriminability criterion, J , which measures the ratio of *between-class variance* B to the *within-class variance* W after projecting the $\{x_i\}$ onto some direction $p \in \mathcal{R}^d$. Depending on the choice of p , the data $\{x_i\}$ may become more or less discriminable w.r.t. the class labels $\{y_i\}$. When Fisher’s linear discriminant is used for actual classification, the p represents the normal vector to the separating hyperplane of the two classes.

Notation: Let N_0 denote the number of data vectors $\{x_i\}$ such that $y_i = 0$, and let X_0 denote the $d \times N_0$ matrix formed from the N_0 data points in class 0. We can define N_1 and X_1 analogously. We write the mean data vector for class 0 as $\bar{x}_0$, i.e., $\bar{x}_0 \doteq \frac{1}{N_0} \sum_{i:y_i=0} x_i$ and define $\bar{x}_1$ analogously. $\bar{x}$ is the mean over all $\{x_i\}$. Finally, define $\bar{X}_0$ (or $\bar{X}_1$) as the $d \times N_0$ (or $d \times N_1$) matrix containing N_0 (or N_1) copies of $\bar{x}_0$ (or $\bar{x}_1$).

Given the notation above, Fisher’s linear discriminability can be computed as

$$J(X_1, X_0, p) = \frac{p^\top B p}{p^\top W p} \quad (1)$$

where the between-class variance is defined as $B = (\bar{x}_1 - \bar{x}_0)(\bar{x}_1 - \bar{x}_0)^\top$ and the within-class variance is defined as $W = (X_1 - \bar{X}_1)(X_1 - \bar{X}_1)^\top + (X_0 - \bar{X}_0)(X_0 - \bar{X}_0)^\top$. W can be regularized as $W_{\text{reg}} = \alpha I + (1 - \alpha)W$ with regularization parameter $\alpha \in [0, 1]$. For the remainder of the paper we refer to W_{reg} simply as W .

One advantage of Fisher’s linear discriminant over other classification methods (e.g., support vector machines, multivariate logistic regression) is that the optimal p^* that maximizes the discriminability of the X_1 from the X_0 can be found analytically [3]:

$$p^*(X_1, X_0) \doteq \arg \max_p J(X_1, X_0, p) = W^{-1}(\bar{x}_1 - \bar{x}_0) \quad (2)$$

Given this solution for p^* , we can define the “Fisher maximal discriminability” of X_1 and X_0 as:

$$J^*(X_1, X_0) \doteq J(X_1, X_0, p^*(X_1, X_0)) \quad (3)$$

3.2 Discriminability for two tasks

Let us now consider a set of data $\{x_i\}$ where each $x_i \in \mathcal{R}^d$, as above. However, now we are interested in *two* sets of class labels for two different binary labeling tasks A and B. For instance, the $\{x_i\}$ might represent a set of face images, and task A might correspond to whether x_i is a smiling face or not, whereas task B might represent whether the face in x_i is male or female. Instead of X_0 and X_1 , we define X_{0a} and X_{1a} to represent the data points $\{x_i\}$ that are labeled as class 0 or 1, respectively, for task A; we define X_{0b} and X_{1b} analogously for task B. Then, the Fisher maximal discriminability for Task A is $J^*(X_{1a}, X_{0a})$ and for Task B is $J^*(X_{1b}, X_{0b})$.

3.3 Finding filter θ to ensure high J^* for Task A, low J^* for Task B

Now, suppose that we filter each x_i using any filter function $\mathcal{F}(\theta, \cdot)$ that is differentiable in θ . By varying θ , we can change the Fisher maximal discriminability J^* for both tasks.¹ Two useful filtering operations include (1) Convolution: $\mathcal{F}(\theta, x) = x * \theta$, where θ represents the convolution kernel in vector form; and (2) pixel-wise “masking”: $\mathcal{F}(\theta, x) = \text{Diag}(\theta)x$ where $\text{Diag}(\theta)$ represents a diagonal matrix formed from the vector θ . In this case, θ represents a “mask” placed over the

¹ J^* can be affected by filter θ even when the linear transformation that the filter induces is invertible. In contrast, *linear separability* (existence/non-existence of a separating hyperplane) cannot be affected by any invertible linear transformation – see Supp. Materials for a proof.

image that allows the original image’s pixels to pass through with varying strength. Let us define $f_i(\theta) \doteq \mathcal{F}(\theta, x_i)$ as the output of the filter $\mathcal{F}$ on x_i , and let us define $F_{0a}(\theta), F_{1a}(\theta), F_{0b}(\theta), F_{1b}(\theta)$ analogously to their (unfiltered) counterparts $X_{0a}, X_{1a}, X_{0b}, X_{1b}$.

Goal: We wish to find the filter parameter vector θ that gives *high* Fisher maximal discriminability (J^*) to Task A, while simultaneously giving *low* Fisher maximal discriminability to Task B. This can be formulated as an optimization problem over θ in several different ways; we choose the following “ratio of discriminabilities” metric $R(\theta)$:

$$R(\theta) \doteq \log \frac{J^*(F_{1b}(\theta), F_{0b}(\theta))}{J^*(F_{1a}(\theta), F_{0a}(\theta))} + \beta \theta^\top \theta \quad (4)$$

where $\beta \geq 0$ is a scalar regularization parameter on θ . Since all of the $F(\cdot)$ are differentiable functions of θ , and since $J^*(\cdot, \cdot)$ is given by the simple formulas in Equations 3 and 1, we can use gradient descent to locally minimize the objective function in Equation 4 w.r.t. θ . The derivative expressions are given in the Supplementary Materials.

3.4 Reconstruction from filtered images

The gradient descent procedure described above will find a θ that locally minimizes $R(\theta)$, but there is no guarantee that the filtered images F will visually resemble the original images X or that humans can interpret them. For machine classification (e.g., when learning a filter to improve inter-dataset performance), this may not matter, but for human labeling applications, it may be necessary to “restore” the filtered images to a more intuitive form. Hence, as an optional step, linear ridge regression can be used to convert the filtered images F to a form more closely resembling the original images X , while still preserving the property that they are highly discriminability for Task A and not highly discriminable for Task B. In particular, we can compute the $d \times d + 1$ (the extra +1 is for the bias term) linear transformation P that minimizes

$$\left\| X - P \begin{bmatrix} F \\ \mathbf{1} \end{bmatrix} \right\|_{\text{Fr}}^2 + \gamma \left\| P \tilde{I} \right\|_{\text{Fr}}^2$$

where $\gamma > 0$ is a scalar ridge strength parameter, $\tilde{I}$ is the identity matrix except that the last ($d + 1$ th) diagonal entry is 0 instead of 1 (so that there is no regularization on the bias weight), and Fr means Frobenius norm.

The ridge term in the linear reconstruction is critical: because many of the filters that the gradient descent procedure learns correspond to invertible linear transformations, linear regression without regularization would transform each f_i back to x_i with no loss of information, which would defeat the purpose of filtering at all. With ridge regression, on the other hand, only the “more discernible” aspects of the image (i.e., the task-of-interest) are restored clearly, while the “less discernible” aspects (pertaining to the distractor task) are not. By varying γ , one can cause each “reconstructed” image g_i (where $g_i \doteq P \begin{bmatrix} f_i \\ 1 \end{bmatrix}$) to strongly resemble the mean image $\bar{x}$ (for large γ) or to strongly resemble its unfiltered counterpart x_i (for small γ). In practice, γ is chosen based on visual inspection of the reconstructed training images so that, to the human observer, the task-of-interest is clearly discriminable while the distractor task is not.

4 Experiment I: synthetic data

In our first experiment we studied whether the proposed algorithm could operate on images (16×16 pixels) consisting of simple line patterns in order to suppress lines in one direction while preserving them in another. For the filtering operation, we chose to learn a convolution kernel of 5×5 pixels. In this study, all images contained one horizontal line and one vertical line at random locations: In Task A, an image was labeled 0 if it contained a vertical line in the left half of the image, and it was labeled 1 if its vertical line was in the right half. In Task B, an image was labeled 0 if its horizontal line was in the top half, and labeled 1 if it was in the bottom half. Each image $x_i \in R^{16 \times 16}$ was generated by adding one vertical and one horizontal line (of pixel intensity 1) at random image positions, and then adding uniform noise in $U[0, 0.5]$ to all pixels in the image. Example images are shown in Figure 2 (left).

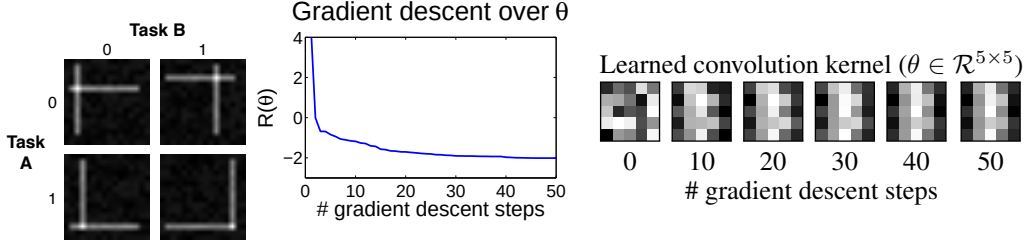


Figure 2: **Left:** Synthetic images consisting of vertical and horizontal lines at different positions. **Center:** gradient descent curve over $R(\theta)$ to learn a filter to preserve Task A and suppress Task B. **Right:** The filters learned at corresponding gradient descent steps.

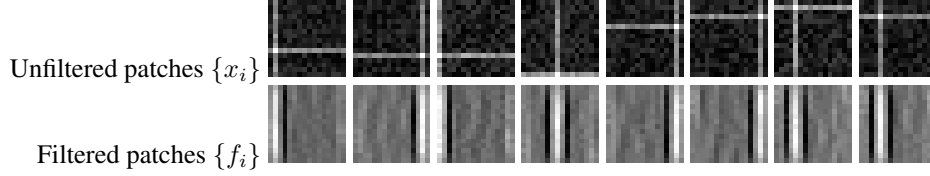


Figure 3: **Top:** unfiltered image patches consisting of superimposed vertical and horizontal lines plus uniform noise. **Bottom:** the same images filtered with a convolution kernel designed to suppress discriminability of Task B (horz. lines) while preserving discriminability of Task A (vert. lines).

After generating 1000 images according to the procedure above, we initialized the convolution kernel $\theta \in \mathbb{R}^{5 \times 5}$ to random values from $U[0, 1]$ (shown in Figure 2 as the filter kernel at gradient descent step 0) and then applied the algorithm above to learn a filter to preserve Task A while suppressing Task B. We set β to 0.5. The descent curve is shown in Figure 2 (**center**), and the learned filter kernel at every 10 steps is shown below the graph.

After filtering the images using the convolution kernel learned after 50 descent steps, we arrived at the images shown in Figure 3. Notice how the horizontal lines have been almost completely eradicated, thus decreasing class discriminability for Task B.

5 Experiment II: natural face images

5.1 Preserve expression, suppress gender

We applied the proposed filter learning method to natural face images from the GENKI dataset [12], which consists of 60,000 images that have been manually labeled for 2 binary attributes – smile/non-smile and male/female – as well as the 2D positions of the eyes, nose, and mouth, and the 3D head pose (yaw, pitch, and roll). In this experiment we assessed whether a filter could be learned to *preserve discriminability of expression* (smile/non-smile), while *suppressing discriminability of gender*. We used a pixel-wise “mask” filter (see Section 3) of the same size as the images (16×16 pixels).

From the whole GENKI dataset we selected a training set consisting of 1740 images (50% male and 50% female; 50% smile and 50% non-smile) whose yaw, pitch, and roll parameters were all within 5 deg of frontal. All of the images were registered to a common face cropping using the center of the eyes and mouth as anchor points. They were then downsampled to a resolution of 16×16 pixels. In addition, we similarly extracted a separate testing set consisting of 100 images (50 males, 50 females, and 50 smiling, 50 non-smiling) with the same 3D pose characteristics. The filter θ was initialized component-wise by sampling from $U[0, 1]$.

Using the training set for learning the filter, and setting the regularization parameter $\beta = 0.5$ ($\alpha = 0.1$ as always), we applied conjugate gradient descent for 100 function evaluations. The learned filter was then applied to all of the training images. Finally, we applied the image reconstruction

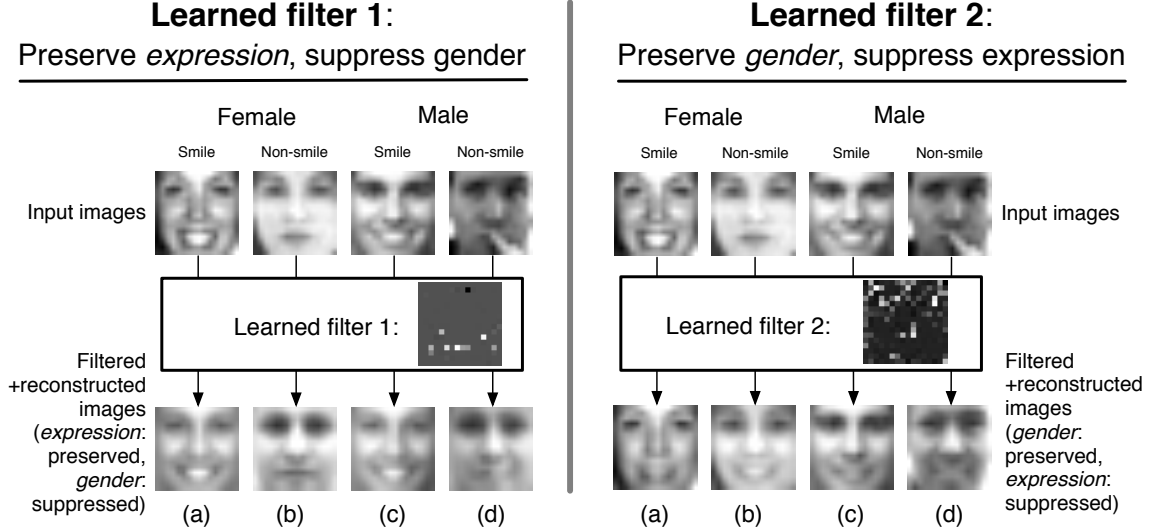


Figure 4: Face images from the GENKI dataset that have been filtered to preserve expression and suppress gender (**left**), or to preserve gender and suppress expression (**right**). Filters were learned using the algorithm presented in Section 3. Learned filter masks are shown next to “Learned filter:”.

technique described in Section 3.4 to restore the filtered images to a form more easily analyzable by humans. The reconstruction ridge parameter γ was selected, by looking only at the training images, so that smile appeared well discriminable whereas gender did not (in this case, $\gamma = 6e - 2$). Examples of the input images as well as the filtered (+ reconstructed) images are shown in Figure 4 (**left**). The learned filter mask is shown to the right of the text “Learned filter”. As shown in the figure, most of the smile information in the filtered images is preserved, and while gender may still be partially discernible, much of the gender information has been suppressed by the filter.

To assess quantitatively the ability of the learned filter to preserve expression and suppress gender, we posted a labeling task to the Amazon Mechanical Turk consisting of 50 randomly selected pairs of *filtered* images selected from the *testing* set using the filter learned according to the above procedure. Each pair contained 1 smiling image and 1 non-smiling image presented in random order (Left or Right), and the labeler was asked to select which image – Left or Right – was “smiling more”. The entire set of 50 image pairs was presented to 10 Mechanical Turk workers, and their opinions on each pair were combined using Majority Vote², with ties resolved by selecting the “Right” image. Accuracy of the Mechanical Turk labelers compared to the official GENKI labels was measured as the probability of correctness on a 2 alternative forced choice task (2AFC), which is equivalent under mild conditions to the Area under the Receiver Operating Characteristics curve (A' statistic) that is commonly used in the automatic facial expression recognition literature (e.g., [8]). We similarly generated a set of 50 randomly selected pairs of filtered images containing 1 male and 1 female. As a baseline, we compared gender and smile labeling accuracy of the filtered images to similar tasks for the *unfiltered* images. Results are shown in Table 1.

As shown in the table, the learned image filter substantially reduced discriminability of gender (from 98% to 58%), while maintaining high discriminability of expression (94% to 96%) compared to the baseline (unfiltered) images.

Comparison to a manually constructed filter: In the case of expression and gender attributes, one might reasonably argue that the “optimal filter” for preserving smile/non-smile and suppressing male/female information would be simply to crop and display only the mouth region of each face. Hence, we performed an additional experiment in which we compared Mechanical Turk labeling accuracy on 50 pairs of filtered images, generated similarly as described above, using a manually

²We also applied an algorithm for optimal integration of crowdsourced labels [13]; see Supp. Materials.

Table 1: Accuracy (2AFC) of workers on Mechanical Turk when labeling filtered GENKI images

Filter method	Expression	Gender
Unfiltered (baseline)	94%	98%
Learned filter 1: Preserve expression, suppress gender	96%	58%
Manually constructed filter: show mouth region only	96%	74%
Learned filter 2: Preserve gender, suppress expression	64%	86%

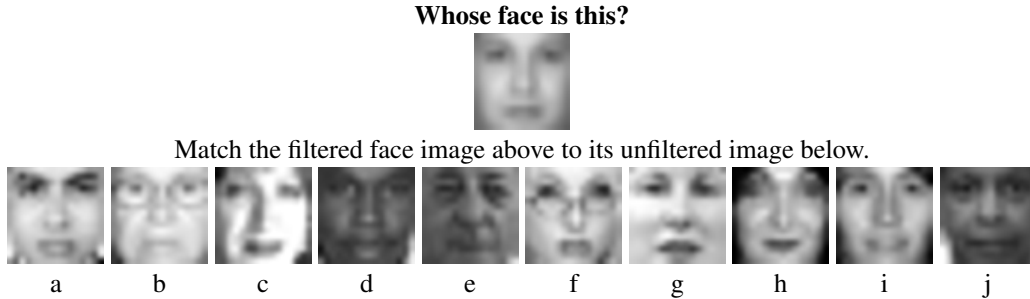


Figure 5: **Top:** The preserve-smile, suppress-gender filter both allows smile/non-smile information to pass through, and also serves as a “face-identification” mechanism, as illustrated in the face recognition task above. The correct face match is (f).

constructed mask filter consisting of just the mouth region (rows 11 through 15 and columns 4 through 13 of each 16×16 face image). Results are in Table 1: while smile discriminability is equally high as the learned filter 1, gender discriminability using the manually constructed filter was substantially higher (74% compared to 58%), indicating that the manually constructed filter actually allowed considerable gender information to pass through. This suggests that a learned filter can work better than a manually constructed one even when strong prior domain knowledge exists.

5.2 Preserve gender, suppress expression

Analogously to Section 5.1, we also learned a filter to preserve *gender* and suppress *expression*, using an identical training procedure to that described above. Examples of the filtered (+ reconstructed) images ($\gamma = 9 \times 10^{-3}$) are shown in Figure 4 (**right**). Note how, for face image (b), the filter not only “suppressed” the expression of the non-smiling female, but actually seems to “flip” the smile/non-smile label so that the woman appears to be smiling. The accuracy compared to baseline (unfiltered) images is shown in Table 1. While accuracy of gender labeling did drop from 98% to 86%, it dropped much more for the smiling labeling (94% to 64%) compared to unfiltered images.

6 Experiment III: Preserving privacy in face images (face de-identification)

The filters learned in Section 5 to preserve smile while suppressing gender information were not designed specifically to suppress the faces’ identity. In practice, however, we found that the identity of the people shown was very difficult to discern in the filtered images. Indeed, it is possible that gender represents one of the first “principal components” of face space, and that, by removing gender, one implicitly removes substantial identity information as well.

To test the hypothesis that identity was effectively masked by suppressing gender, we created a face recognition test consisting of 40 questions similar to Figure 5: a single face must be matched to one of 10 unfiltered candidate face images. In half of the questions, the face to be matched was *filtered* using the preserve-expression, suppress-gender filter (Section 5). In this case, the matching task was very challenging. In the other half of the questions, the face to be matched was *unfiltered*, and hence the matching task was nearly trivial. The order of the questions presented to the labelers was randomized, and we obtained results from 10 workers on the Amazon Mechanical Turk.

Results: For the *unfiltered* images, the rate of successful match was 100% for each of the 10 labelers. For the *filtered* images, the rate of successful match, using Majority Vote, was 15%, indicating that the preserve-smile, suppress-gender filter also removed identity. The highest successful matching rate of the filtered images for any one labeler was 30%. Baseline rate for guessing was 10%.

7 Experiment IV: Filtering to improve generalization across datasets

Here we provide a proof-of-concept of learning a filter that improves generalization to novel datasets. Consider a dataset of face images, such as GENKI, with a positive correlation between gender and smile. If a male/female classifier were trained on these data, then it might learn to distinguish gender not just by male/female information alone, but also by the correlated presence of smile. When tested on a different dataset with a different covariance structure, e.g., with negative correlation between smile and gender, the classifier would likely perform badly. If we first filter the data to suppress smile information but preserve gender information, then the trained classifier might not suffer when applied to the new dataset.

To test this hypothesis, we partitioned the GENKI images used in Section 5 into a training set (4062 images) and a testing set (970 images). As before, all images were 16×16 pixels. In the training set, the correlation between smile and gender was $+0.64$, whereas in the testing set, it was -1 . We then trained two support vector machine classifiers with radial basis function (RBF) kernels to classify gender. One classifier was trained on *filtered* training images, using the gender-preservation, smile-suppression filter learned in Section 5, and the other was trained on *unfiltered* images. The RBF width γ was optimized independently ($\gamma \in \{10^{-8}, 10^{-7}, \dots, 10^{+4}\}$) for each classifier using a “holdout” set (a randomly selected 20% subset of the training images). The classifier trained on unfiltered images was then applied to the unfiltered testing set, and the classifier trained on filtered images was applied to the filtered testing set.

Results: Filtering the images using the gender-preservation, smile-suppression filter resulted in substantially increased generalization performance: 2AFC accuracy was 0.92 for the SVM trained on filtered images, whereas it was only 0.79 for the SVM trained on unfiltered images.

8 Related work

We are unaware of any work that specifically learns filters to simultaneously preserve and suppress different image attributes. However, the approach taken in this paper is somewhat reminiscent of work by Birdwell and Horn [2], in which an optimal combination of a fixed set of filters is learned to minimize the conditional entropy of class labels given the filtered inputs.

In terms of applications to data privacy, our method is related to “face de-identification” methods such as [9, 6, 5]. Such methods identify faces which are similar either in terms of pixel space ([9, 5]), eigenface space ([9]), or Active Appearance Model parameters ([6]), and then replace clusters of k similar faces with their mean face, thus guaranteeing that no face can be identified more specifically than to a cluster of k candidates. However, in contrast to our proposed algorithm, these methods cannot be “reversed” to maximally preserve identity while minimizing discriminability of a given face attribute.

For the application of generalizing to datasets with different image statistics, our work is related to the problem of covariate shift [11] and the field of transfer learning [10]. The method proposed in our paper is useful when dataset differences are known a priori – the learned filter helps to overcome covariate shift by altering the underlying images themselves.

9 Summary

We have presented a novel method for learning filters that can preserve binary discriminability for the task-of-interest, while suppressing discriminability for a distractor task. The effectiveness of the approach was demonstrated on synthetic as well as natural face images. Interestingly, the suppression of gender implicitly removed considerable facial identity information, which renders the technique useful for labeling tasks where personal identity should remain private. Finally, we demonstrated that “discriminately decreasing discriminability” may help classifiers to generalize across datasets.

Supplementary Materials

9.1 Proof: Class Separability Unaffected by Invertible Linear Transformation

Let sets $\mathcal{X}_1$ and $\mathcal{X}_0$ contain the data points (column vectors) for classes 1 and 0, respectively. Let T be an arbitrary invertible linear transformation. We define *separability* of $\mathcal{X}_1$ and $\mathcal{X}_0$ to mean that there exists a hyperplane, with normal vector w , such that $w^\top x_i > w^\top x_j$ for every $x_i \in \mathcal{X}_0$ and every $x_j \in \mathcal{X}_1$. *Claim:*

$$\exists w : w^\top x_i > w^\top x_j \iff \exists \hat{w} : \hat{w}^\top (Tx_i) > \hat{w}^\top (Tx_j)$$

Proof of $\Rightarrow$: There exists w such that $w^\top x_i > w^\top x_j$ for every $x_i \in \mathcal{X}_0$ and every $x_j \in \mathcal{X}_1$. Since T is invertible, the matrix T^{-1} exists. Hence, there exists w such that $w^\top T^{-1}Tx_i > w^\top T^{-1}Tx_j$. We can define $\hat{w}^\top \doteq w^\top T^{-1}$. Then, $\hat{w}^\top (Tx_i) > \hat{w}^\top (Tx_j)$ for every $x_i \in \mathcal{X}_0$ and every $x_j \in \mathcal{X}_1$.

Proof of $\Leftarrow$: There exists $\hat{w}$ such that $\hat{w}^\top (Tx_i) > \hat{w}^\top (Tx_j)$ for every $x_i \in \mathcal{X}_0$ and every $x_j \in \mathcal{X}_1$. Then we can define $w^\top \doteq \hat{w}^\top T$, and we have $w^\top x_i > w^\top x_j$ for every $x_i \in \mathcal{X}_0$ and every $x_j \in \mathcal{X}_1$.

9.2 Experiment II: natural face images – supplementary results

For the natural face image labeling tasks, in addition to combining opinions of the 10 workers on Mechanical Turk using Majority Vote, we also tried using a recently developed method by Whitehill, et. al [13] for combining multiple opinions when the quality of the labelers is unknown a priori. Their algorithm is called GLAD (Generative model of Labels, Abilities, and Difficulties) and its source code is available online.

In general the results were similar to Majority Vote:

Accuracy (2AFC) of labels from Amazon Mechanical Turk using GLAD [13] to combine opinions		
Filter method	Expression	Gender
Unfiltered (baseline)	94%	98%
Learned filter 1: Preserve expression, suppress gender	94%	54%
Manually constructed filter: (show mouth region only)	98%	72%
Learned filter 2: Preserve gender, suppress expression	64%	92%

9.3 Derivatives expressions for gradient descent

Let θ_j represent the j th component of vector θ . We abbreviate $p^*(F_1, F_0)$ as p^* . Let us also abbreviate each matrix $F(\theta)$ as simply F . Finally, let $\bar{f}_0(\theta)$ and $\bar{f}_1(\theta)$ represent the mean *filtered* vectors (with filter θ) for class 0 and 1, corresponding to $\bar{x}_0$ and $\bar{x}_1$, respectively.

To compute $\frac{\partial R}{\partial \theta_j}$, we can apply the chain rule several times in succession. Most of the derivatives are relatively straightforward to derive using standard formulas from linear algebra; however, we

present derivatives for the most important terms:

$$\begin{aligned}
\frac{\partial}{\partial \theta_j} R(\theta) &= \frac{\frac{\partial}{\partial \theta_j} J^*(F_{1a}, F_{0a})}{J^*(F_{1a}, F_{0a})} - \frac{\frac{\partial}{\partial \theta_j} J^*(F_{1b}, F_{0b})}{J^*(F_{1b}, F_{0b})} \\
&= \frac{\frac{\partial}{\partial \theta_j} J(F_{1a}, F_{0a}, p^*(F_{1a}, F_{0a}))}{J(F_{1a}, F_{0a}, p^*(F_{1a}, F_{0a}))} - \frac{\frac{\partial}{\partial \theta_j} J(F_{1b}, F_{0b}, p^*(F_{1b}, F_{0b}))}{J(F_{1b}, F_{0b}, p^*(F_{1b}, F_{0b}))} \\
\frac{\partial}{\partial \theta_j} J(F_0, F_1, p^*) &= \frac{\frac{\partial}{\partial \theta_j} (p^{*\top} B p^*)}{p^{*\top} W p^*} - \frac{p^{*\top} B p^*}{(p^{*\top} W p^*)^2} \frac{\partial}{\partial \theta_j} (p^{*\top} W p^*) \\
\frac{\partial}{\partial \theta_j} p^* &= \frac{\partial}{\partial \theta_j} (B^{-1}(\bar{f}_1(\theta) - \bar{f}_0(\theta))) \\
&= -B^{-1} \left(\frac{\partial}{\partial \theta_j} B \right) B^{-1}(\bar{f}_1(\theta) - \bar{f}_0(\theta)) + B^{-1} \left(\frac{\partial}{\partial \theta_j} \bar{f}_1(\theta) - \frac{\partial}{\partial \theta_j} \bar{f}_0(\theta) \right) \\
\frac{\partial}{\partial \theta_j} \bar{f}_k(\theta) &= \frac{\partial}{\partial \theta_j} \left(\frac{1}{N_k} \sum_{i: y_i=k} f_i(\theta) \right) \\
&= \frac{1}{N_k} \sum_{i: y_i=k} \frac{\partial}{\partial \theta_j} f_i(\theta)
\end{aligned}$$

The derivatives for $\frac{\partial}{\partial \theta_j} f_i(\theta)$ depend on the particular kind of filter. In the subsections below we find the derivatives for a convolution filter, and a pixel-wise “mask” filter.

Derivatives of linear convolution filter

For the case of convolving two 1-D functions f and g whose domains are both $\mathcal{R}$ (all real numbers), differentiating the convolution operator is trivial: $\frac{d}{dg}(f * g) = f$. However, in our case we are interested in finite, discrete convolution of a convolution kernel and an image. Consider for the moment the case of 1-D convolution of a 3-element kernel θ with a 3-element image x :

$$\theta = [a \quad b \quad c] \quad (5)$$

$$x = [r \quad s \quad t] \quad (6)$$

$$\theta * x = [ar \quad as + br \quad at + bs + cr \quad bt + cs \quad ct] \quad (7)$$

$$(8)$$

For the purposes of gradient descent, it is necessary to “clip” the convolution operation’s output so that it retains the same size as the input x ; hence, we define:

$$\text{Clip}(\theta * x) = [as + br \quad at + bs + cr \quad bt + cs] \quad (9)$$

$$(10)$$

We can now differentiate $\text{Clip}(\theta * x)$ w.r.t. each dimension of θ :

$$\frac{\partial}{\partial a}(\text{Clip}(\theta * x)) = [s \quad t \quad 0] \quad (11)$$

$$\frac{\partial}{\partial b}(\text{Clip}(\theta * x)) = [r \quad s \quad t] \quad (12)$$

$$\frac{\partial}{\partial c}(\text{Clip}(\theta * x)) = [0 \quad r \quad s] \quad (13)$$

$$(14)$$

Hence, the derivatives of the clipped convolution are computed by “sliding” the row vector x across a row of 0’s and clipping at the appropriate indices. For the case of finite discrete 2-D convolution, the situation is analogous – the gradient of the 2-D convolution $\theta * x$ is found by “sliding” the image matrix x over a matrix of 0’s.

While it is possible to specify in mathematical notation the exact indices used for sliding and clipping, it is tedious and unilluminating. Instead we provide a snippet of Matlab code for computing $\frac{\partial}{\partial \theta} \text{Clip}(\theta * x)$ for 2-D image convolution with 0-padding (no wrap-around):

```
function dConvidtheta = computedConvidtheta (x, theta, i)
% dConvidtheta = COMPUTEDCONVIDTHETA (x, theta, i)
% computes the derivative with respect to theta_i
% of conv(x, theta).

    m = sqrt(length(theta));          % theta corresponds to m x m convolution kernel
    n = sqrt(length(x));              % x corresponds to n x n image
    idxs = reshape(1:length(theta), [ m m ]);
    [r,c] = find(idxs == i);

    xim = reshape(x, [ n n ]);
    dConvidthetaim = zeros(m+n-1, m+n-1);
    dConvidthetaim(r:r+n-1, c:c+n-1) = xim;

    % Trim the matrix back down to only be the "center" part of the convolution result
    upperPadding = ceil((size(dConvidthetaim, 1) - n) / 2);
    leftPadding = ceil((size(dConvidthetaim, 2) - n) / 2);
    lowerPadding = size(dConvidthetaim, 1) - n - upperPadding;
    rightPadding = size(dConvidthetaim, 2) - n - leftPadding;
    dConvidthetaim = dConvidthetaim(1+upperPadding:end-lowerPadding,
                                   1+leftPadding:end-rightPadding);
    dConvidtheta = dConvidthetaim(:);
end
```

Derivatives of element-wise “mask” filter

If we let the filter $\mathcal{F}(\theta, x) = D(\theta)x$, where $D(\theta)$ is a diagonal matrix formed from vector θ , then

$$\begin{aligned} \frac{\partial}{\partial \theta_j} f_i(\theta) &= \frac{\partial}{\partial \theta_j} \mathcal{F}(\theta, x_i) \\ &= \frac{\partial}{\partial \theta_j} (D(\theta)x_i) \\ &= I_j x_i \end{aligned}$$

where I_j consists of all 0's except the (j, j) th entry which is 1.

References

- [1] T. Bell and T. Sejnowski. The “independent components” of natural scenes are edge filters. *Vision Research*, 1997.
- [2] J. Birdwell and R. Horn. Optimal filters for attribute generation and machine learning. In *Conference on Decision and Control*, 1990.
- [3] C. Bishop. *Pattern Recognition and Machine Learning*. Springer, 2006.
- [4] R. Fisher. The use of multiple measurements in taxonomic problems. *Annals of Eugenics*, 1936.
- [5] R. Gross, E. Airoldi, and L. Sweeney. Integrating utility into face de-identification. In *Workshop on Privacy-Enhancing Technologies*, 2005.
- [6] R. Gross, L. Sweeney, F. de la Torre, and S. Baker. Model-based face de-identification. In *Computer vision and pattern recognition*, 2006.
- [7] H. Lee, R. Grosse, R. Ranganath, and A. Ng. Convolutional deep belief networks for scalable unsupervised learning of hierarchical representations. In *International Conference on Machine Learning*, 2009.
- [8] P. Lucey, J. F. Cohn, T. Kanade, J. Saragih, Z. Ambadar, and I. Matthews. The extended cohn-kanade dataset (CK+): A complete dataset for action unit and emotion-specified expression. In *Computer Vision and Pattern Recognition Workshop on Human-Communicative Behavior*, 2010.
- [9] E. Newton, L. Sweeney, and B. Malin. Preserving privacy by de-identifying face images. *IEEE Transactions on knowledge and data engineering*, 2005.
- [10] S. Pan and Q. Yang. A survey on transfer learning. *IEEE Transactions on knowledge and data engineering*, 2010.

- [11] H. Shimodaira. Improving predictive inference under covariate shift by weighting the log-likelihood function. *Journal of Statistical Planning and Inference*, 2000.
- [12] <http://mplab.ucsd.edu>. The MPLab GENKI Database.
- [13] J. Whitehill, P. Ruvolo, T. Wu, J. Bergsma, and J. Movellan. Whose vote should count more: Optimal integration of labels from labelers of unknown expertise. In *Neural Information Processing Systems*, 2009.